



EXTENDED BATTERY MODULE TO PROLONG RUNTIME

The battery module ensures extended system runtime during power outages


Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery modules come with DC plug-and-play power connectors to allow for adding multiple EBMs. The sealed lead-acid batteries used within the EBMs are stable and safe, which ensure the power system's reliable performance.

SERIES FEATURES

- Tower Form Factor
- EBM Expansion Capability
- Sealed Lead-acid Batteries
- Metal Housing

PRODUCT CALLOUTS

1. On-board Replaceable Fuse Cover
2. DC Output Connector
3. DC Input Connector

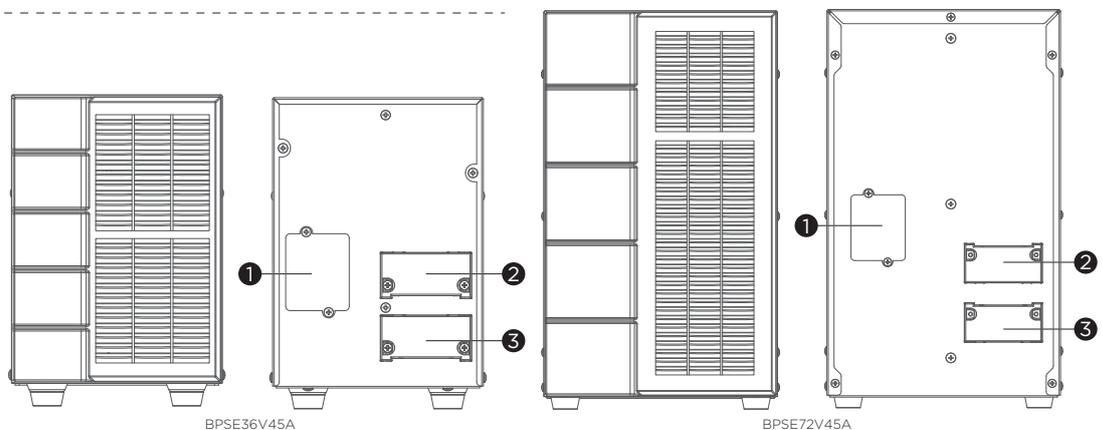

TECHNICAL SPECIFICATIONS

Model Name	BPSE36V45A	BPSE72V45A
General		
Nominal Output Voltage (Vdc)	36	72
Rated Output Current (A)	45	45
Battery		
Battery Type	Sealed Lead-acid	Sealed Lead-acid
Built-in Charger	No	No
Typical Recharge Time (Hours)	10 (Depends on Connected UPS)	10 (Depends on Connected UPS)
User Replaceable	No	No
Compatible UPS Models	OLS1000E, OLS1500E, OLS1000EXL, OLS1500EXL	OLS2000E, OLS3000E, OLS2000EXL, OLS3000EXL
Physical		
Form Factor	Tower	Tower
Physical Size		
Dimensions (WxHxD) (mm.)	151 x 225 x 394	196 x 337 x 416
Weight (kg.)	17.2	34.2
Environmental		
Operating Temperature (°C)	0 - 40	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 90	0 - 90
Certifications		
Certifications*	CE, EAC, LOA	CE, EAC, LOA
RoHS	Yes	Yes

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.

