



## ROBUST RACKS PROTECT YOUR EQUIPMENT

### Robust rack enclosure with optional accessories to organize your IT equipment

Ideal for server room and data center solutions, the standard Rack Enclosure Series protects and supports rackmount IT equipment. The products feature exclusive hex perforated design to enable optimal airflow. The lockable doors and side panels with keyed-alike locks heighten the security. Convenient features include removable doors and side panels, rack U numbering, depth-adjustable mounting rails, rear accessory channels with toolless mounting slots, easy cabling and integrated grounding system. The standard design is compatible with various accessories to customize IT solutions based on different needs.

#### APPLICATION


- Office
- Back Office
- Server Room
- Data Center
- Factory
- Airport
- Train Station
- Bus Station

#### SERIES FEATURES

- Adjustable Mounting Depth
- Device Ventilation Capability
- Caster Kit for Mobility
- Secured with Locks

#### PRODUCT CALLOUTS

1. Removable, Reversible, Lockable, and Hexagonal Perforated Front Door
2. Removable and Lockable Side Panels (4)\*
3. Vented and Removable Roof Panel
4. Removable, Lockable, and Hexagonal Perforated Split Rear Doors
5. Rear Accessory Channels (2)
6. Depth-adjustable Vertical Rack Angles (4)
7. Rack U Numbering
8. Integrated Electrical Grounding
9. Preinstalled Leveling Feet (4)
10. Preinstalled Casters (4)
11. Shipping Brackets (2)
12. Rack Row Bolt Hardware

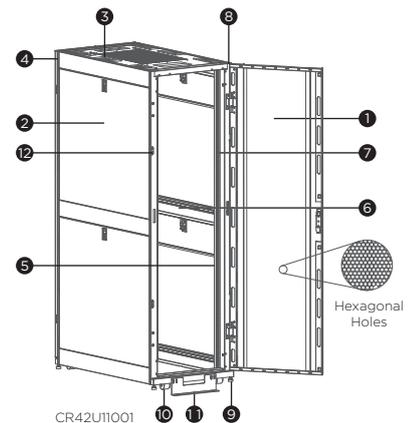

\*Quantity may vary by models

CR42U11001

#### TECHNICAL SPECIFICATIONS

Model Name	CR24U11001	CR42U11001
<b>Physical Details</b>		
Rack Height (U)	24	42
Rack Door Type	Perforated Metal Door	Perforated Metal Door
Equipment Mounting Hole Type	Square Mounting Holes	Square Mounting Holes
Weight Capacity - Stationary (kg)	1365	1365
Weight Capacity - Dynamic (kg)	1020	1020
Maximum Mounting Depth (cm)	90.5	90.5
Dimensions (WxHxD) (in.)	23.6 x 46.9 x 42.1	23.6 x 78.4 x 42.1
Dimensions (WxHxD) (cm)	60 x 119.2 x 107	60 x 199.2 x 107
Weight (kg)	80	128
<b>Management</b>		
Leveling Feet	Preinstalled	Preinstalled
Rolling Casters	Preinstalled	Preinstalled
Joining Brackets	Yes	Yes
Removable Roof	Yes	Yes
Removable Door(s) and Side Panels	Yes	Yes
Reversible Front Door	Yes	Yes
Lockable Doors and Side Panels	Yes, Keyed-alike	Yes, Keyed-alike
Rack U Numbering	Yes	Yes
Ventilation	Perforated Door and Ventilated Roof	Perforated Door and Ventilated Roof
Heat Dissipation	Optional Fan Kit	Optional Fan Kit
Cable Management	Pre-installed Rails with Toolless Mounting Slots	Pre-installed Rails with Toolless Mounting Slots
Cable Access	Roof	Roof
Integrated Grounding	Yes	Yes
<b>Certifications</b>		
Certifications*	CE	CE
Approvals	DIN41491, DIN41494, EIA/ECA-310-E, IEC 297-2, RoHS	DIN41491, DIN41494, EIA/ECA-310-E, IEC 297-2, RoHS

\*Certifications may vary according to different regions. Visit [www.cyberpower.com](http://www.cyberpower.com) for more information.  
#All specifications are subject to change without notice.