

Highlights

Comprehensive Surveillance

Simultaneously record and view real-time video streams from up to 16 Cameras on a local network or remotely over the Internet.

Flexible and Dependable

Supports up to 24TB of internal storage, providing months of video footage capacity.

Convenient and Easy to Use

Simple HDMI/VGA interfaces and USB mouse support allow extensive actions to be taken on viewing, recording, adjusting cameras.



DNR-F4216-16P

Vigilance 16-Channel H.265 PoE Network Video Recorder

Features

Trustworthy Surveillance

Reliable Network Video Recorder for home and business. View real-time and recorded video of all 16 Cameras from anywhere at your home or office, or remotely via the Internet.

Convenient Interface

User-friendly interface provides simultaneous live view, recording, and playback.

Effortless network camera setup & management with HDMI/VGA ports and USB mouse support.

Easy to use mobile app lets you monitor the system remotely on a mobile device.

Full-Featured Functionality

Supports H.264, H.265 and H.265+ compression formats.

Powerful AI with human and vehicle detection, people count and face recognition¹.

Continuous, scheduled or on event recording with automatic overwrite function.

Flexible and Scalable

One Standalone device - eliminates the need for a dedicated PC.

Two SATA 3.5" HDD interfaces, up to 12 TB capacity per Hard Disk Drive², up to 24 TB of video storage.

Supports ONVIF compliant Network Cameras.

The DNR-F4216-16P is an advanced Network Video Recorder (NVR) which supports up to 16 multichannel Network Cameras with H.265 and H.264 recording. It supports up to two SATA Hard Disks for up to 24TB video storage. Thanks to a powerful embedded system, the NVR can record video from Network Cameras located on local or remote sites onto dedicated HDD storage without having to turn on a PC. The DNR-F4216-16P NVR supports real-time monitoring and playback via two HDMI or VGA ports, a web browser, or via a mobile app, giving the operator the ability to watch live or recorded footage from anywhere, at anytime. Importantly, the NVR can continue recording while simultaneously allowing the user to watch the live view and search for playback videos. Complete video management, display and playback capabilities make the DNR-F4216-16P a critical piece of equipment in your efforts to ensure a safe and secure workplace environment.

Automated Surveillance

The DNR-F4216-16P NVR provides a variety of options for viewing live streams and Camera footage onscreen as well as automatically recording events as they happen, with or without an operator on-site. Event-based recording is available for Cameras with motion detection and Alarm In connections are supported for triggers such as door and window sensors for automated recording during unusual events. User-defined scheduled recording and continuous recording with automatic overwriting options help to ensure the surveillance system is running reliably, even when not monitored on an ongoing basis.

Live Monitoring

D-Link's intuitive GUI interface simplifies viewing live and recorded video from the NVR. The camera status page shows connection and recording status, along with frame rate and bit rate information for each camera. Users are provided with a variety of options for viewing and organising camera footage on-screen. Smart search features including specific face and vehicle search capabilities, combined with calendar filters allow administrators to quickly find the specific footage they need.

Extensive Recording Functionality

The DNR-F4216-16P's intuitive interface allows for easy configuration of many functions including compression, resolution, bit rate and frame rate for all connected Cameras. These extensive options provide administrators the flexibility to prioritise storage space and video quality. The NVR records video from up to 16 Network Cameras simultaneously. Once Cameras have been set up, a highly configurable scheduling system allows for continuous recording, scheduled recording or event based recording. Each Camera can be set to record independently at preset intervals. The NVR can be configured to overwrite the oldest data automatically when HDD space runs out, allowing for continuous and uninterrupted recording.


Powerful Event Management

The NVR centrally controls the email notifications and recording for all the connected Cameras. Input triggered from Camera events can additionally be monitored. These events will be logged, with notifications via email. Users can set up multiple contacts for event notification. A straightforward logging system organises events by date for easy recall.

Smooth Streaming from Anywhere

The DNR-F4216-16P also enables users to remotely view and manage the NVR from anywhere via a web browser. The Gigabit Ethernet port provides superior bandwidth for viewing 16 Camera streams simultaneously, so critical moments can be monitored and captured at all times. Rounding out the features is the D-Link CCTV Mobile App that lets administrators easily and remotely access and monitor the DNR-F4216-16P on a mobile device — making this 16 Channel H.265 PoE Network Video Recorder a complete, easy-to-use enterprise Surveillance Solution.

Network Setup


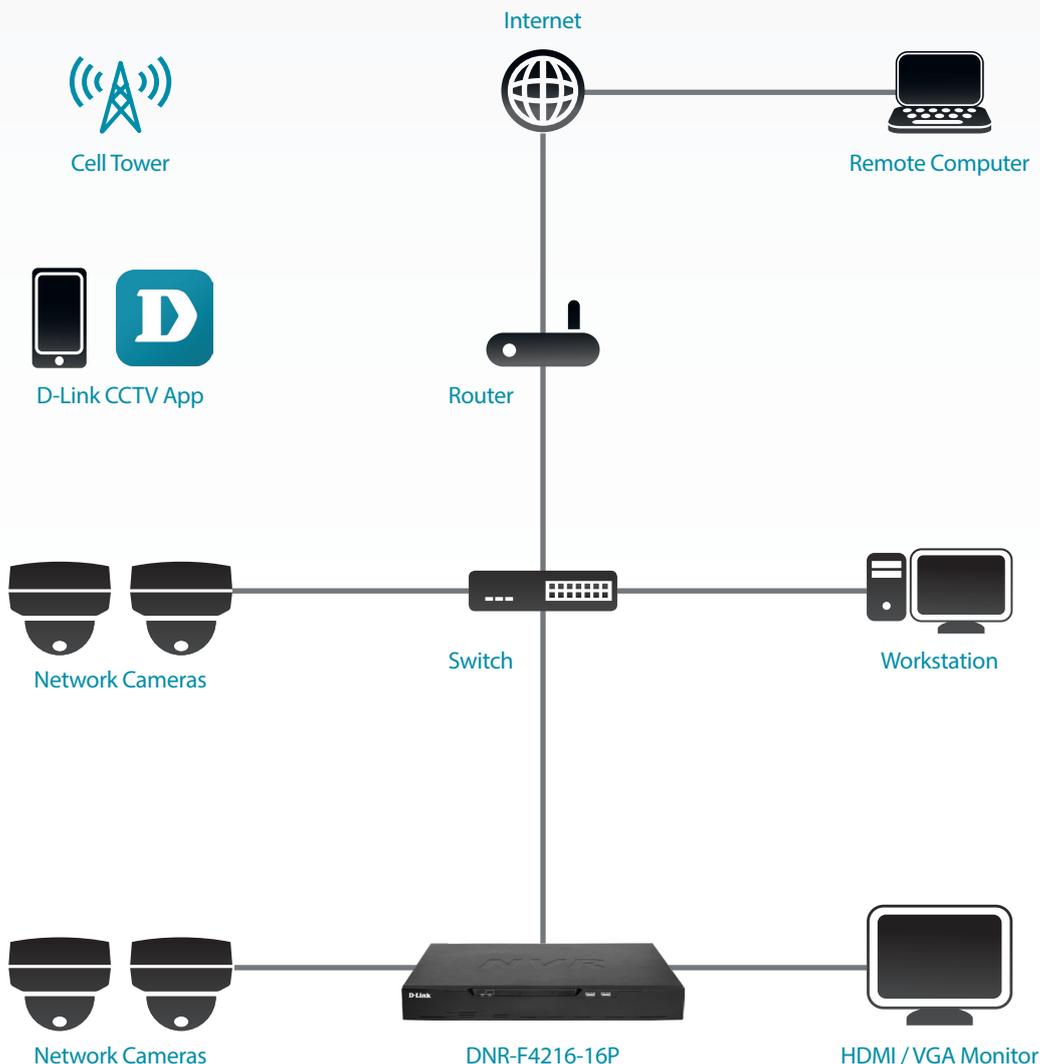


Technical Specifications		
General		
Standards	<ul style="list-style-type: none"> • IEEE 802.3x/u/ab • SATA I/II/III 	<ul style="list-style-type: none"> • Auto MDI/MDI-X
HDD ²	<ul style="list-style-type: none"> • 2x SATA ports, up to 12 TB capacity per HDD Drive³ 	
Reset	<ul style="list-style-type: none"> • Reset through GUI 	<ul style="list-style-type: none"> • Password Recovery
Network Interface	<ul style="list-style-type: none"> • Gigabit Ethernet port (10/100/1000 Mbps) 	
I/O Ports	<ul style="list-style-type: none"> • 1 x 10/100/1000 Base-T RJ-45 port • 1 x HDMI (supports 4K resolution) • 1 x VGA (supports 1080P resolution) • 1x eSATA port 	<ul style="list-style-type: none"> • 2 x USB 2.0 ports, 1x USB 3.0 port • 3.5 mm Audio Input x 1, Output x 1 • 8 x Alarm In, 2 x Alarm Out
PoE	<ul style="list-style-type: none"> • 16 x 10/100 Mbps RJ-45 ports • IEEE 802.3af/at 	<ul style="list-style-type: none"> • 128 W total PoE budget
Features		
Supported Cameras ⁴	<ul style="list-style-type: none"> • Supports ONVIF compliant IP Cameras 	<ul style="list-style-type: none"> • Supports auto-discovery
Live View/Playback	<ul style="list-style-type: none"> • HDMI port max output resolution: 4K⁴ 	<ul style="list-style-type: none"> • VGA port max output resolution: 1080p
Multi-Screen Display	1st Screen: 1/4/9/16 channels 2nd Screen: 1/4/9/16 channels	
Recording Performance	<ul style="list-style-type: none"> • Max recording bitrate: 112 Mbps 	
Audio and Video Recording	<ul style="list-style-type: none"> • Synchronised Audio and Video recording 	
Compression Format	<ul style="list-style-type: none"> • H.264 • H.265 	<ul style="list-style-type: none"> • H.265+
Audio Compression Format	<ul style="list-style-type: none"> • G.711 	<ul style="list-style-type: none"> • AAC
Video Setting	<ul style="list-style-type: none"> • Resolution • Bitrate 	<ul style="list-style-type: none"> • Frame rate • Video profile selection
Recording Mode	<ul style="list-style-type: none"> • Schedule, manual and event-based recording 	<ul style="list-style-type: none"> • Motion-triggered recording
Alarm Triggers	<ul style="list-style-type: none"> • Motion Detection, Video Loss, Camera Tamper, Alarm in, IVS, Disk error, Network error 	
Live View Control	<ul style="list-style-type: none"> • Manual record • Instant playback • Audio enable/disable • PTZ control 	<ul style="list-style-type: none"> • 3D (on screen PTZ) • Digital zoom in/zoom out • Image setting • Two-Way Audio
Playback Control	<ul style="list-style-type: none"> • Normal • Rewind • Play • Stop • Next frame 	<ul style="list-style-type: none"> • Playback speed adjust (maximum triple speeds) • Audio enable/disable • Start Backup • Batch Backup • 1/6/12/24 Hour(s) options • Zoom
AI Face Recognition ¹	Real-time face capture and recognition with face recognition results: Name and ID, stranger, channel, similarity	
AI Multi-Objective ¹	Real-time capture and display vehicle, human body, non-motor vehicle, face recognition results (recognised, stranger, channel, similarity).	
Overwrite Recording	<ul style="list-style-type: none"> • Auto recycling when disk storage is full 	
Video Export	<ul style="list-style-type: none"> • Export video to MP4 file format 	
User Account	<ul style="list-style-type: none"> • Additional accounts can be created to allow users system access and specify permission levels for Camera Channels, PTZ etc. 	

DDNS	<ul style="list-style-type: none"> • No_IP • AutoDNS 	<ul style="list-style-type: none"> • DynDNS
System Time	<ul style="list-style-type: none"> • Sync with NTP server • Manual Input time 	<ul style="list-style-type: none"> • Time Zone • Daylight Saving Time
System Status	<ul style="list-style-type: none"> • Channel status • HDD status 	<ul style="list-style-type: none"> • System status • Network status
Network Service Protocols	<ul style="list-style-type: none"> • IPv4, ARP, TCP, UDP, ICMP • DHCP Server (PoE ports) • DHCP Client (LAN ports) • NTP Client • DNS Client • DDNS Client • SMTP Client 	<ul style="list-style-type: none"> • HTTP/HTTPS Server • RTP • RTSP over TCP • RTCP • IP filtering • SNMP v1/v2c/v3
User Interface	<ul style="list-style-type: none"> • HTTP Web browser • Console via HDMI/VGA 	<ul style="list-style-type: none"> • D-Link CCTV Mobile App • DCMS+ Software
Requirements for Web Interface	<ul style="list-style-type: none"> • Chrome, Firefox, Edge, Safari (MJPEG only) 	
D-Link CCTV Mobile App	<ul style="list-style-type: none"> • Available for Android, iOS 	
Requirements for DCMS+ Software	Free download. Compatible with Windows 10 (64 bit), Windows 11, Windows Server 2012, Windows Server 2016 / 2019 / 2022	

Physical

Weight	<ul style="list-style-type: none"> • 2.75 kg (without HDD) 	
Power Input	<ul style="list-style-type: none"> • Input: 100 to 240 V AC/ 3.0 A, 50 to 60 Hz 	
Power Consumption	<ul style="list-style-type: none"> • Max. 150 W 	
Temperature	<ul style="list-style-type: none"> • Operating: 0 to 50 °C 	<ul style="list-style-type: none"> • Storage: -20 to 70 °C
Humidity	<ul style="list-style-type: none"> • Max of 90% non-condensing 	
Certifications	<ul style="list-style-type: none"> • CE • FCC 	<ul style="list-style-type: none"> • RCM

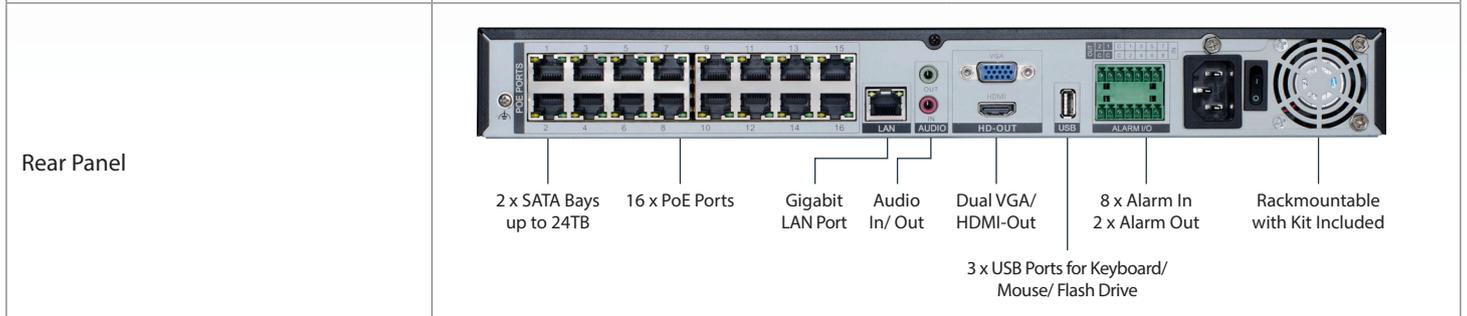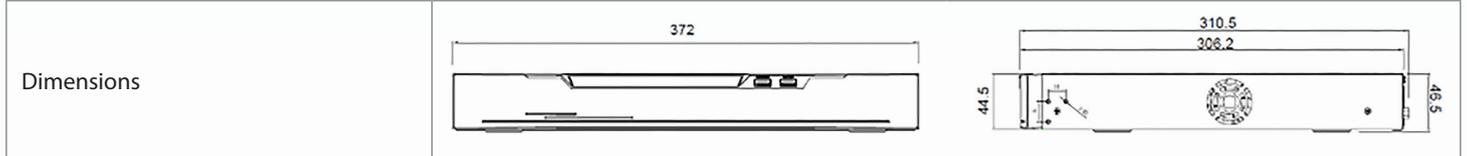

Order Information

Part Number	Description
DNR-F4216-16P	Vigilance 16 Channel Network Video Recorder with 2 HDD Bays and 16 Built-in PoE Ports

¹ Feature set depends on the camera being used with the NVR.

² Hard Disks are not included.

³ Supports up to 2 Hard Disks of up to 12 TB each for a total of 24 TB.

⁴ 1 Channel supports 12MP, 4 Channels support 4MP, 8 Channels support 1080p, 16 Channels support D1 resolution at 30fps.